




# METRIC PULLEY HTD 14M-40

PILLOT BORE, ALLUMINIUM MATERIAL

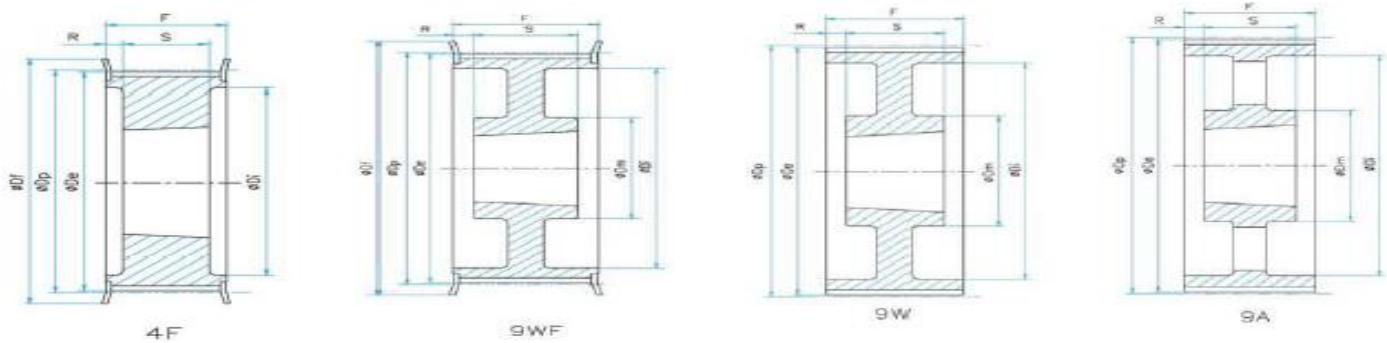


| Part Number  | Teeth No. | Config. | Material  | Bush No. | Dp     | De     | Df  | Dm  | Di  | F  | S  | R   | Flange Dimension |
|--------------|-----------|---------|-----------|----------|--------|--------|-----|-----|-----|----|----|-----|------------------|
| TL28-14M-40  | 28        | 4F      | STEEL     | 2012     | 124.78 | 122.12 | 128 | -   | 94  | 54 | 32 | 11  | 128x107x2.5      |
| TL29-14M-40  | 29        | 4F      |           | 2012     | 129.23 | 126.57 | 138 | -   | 98  | 54 | 32 | 11  | 138x112x2.5      |
| TL30-14M-40  | 30        | 4F      |           | 2012     | 133.69 | 130.99 | 138 | -   | 98  | 54 | 32 | 11  | 138x112x2.5      |
| TL32-14M-40  | 32        | 4F      |           | 2012     | 142.60 | 139.88 | 154 | -   | 108 | 54 | 32 | 11  | 154x122x2.5      |
| TL34-14M-40  | 34        | 4F      |           | 2517     | 151.52 | 148.79 | 160 | -   | 110 | 54 | 45 | 4.5 | 160x130x2.5      |
| TL36-14M-40  | 36        | 4F      |           | 2517     | 160.43 | 157.68 | 168 | -   | 120 | 54 | 45 | 4.5 | 168x135x2.5      |
| TL38-14M-40  | 38        | 4F      |           | 2517     | 169.34 | 166.60 | 183 | -   | 130 | 54 | 45 | 4.5 | 183x145x2.5      |
| TL40-14M-40  | 40        | 4F      |           | 2517     | 178.25 | 175.49 | 188 | -   | 138 | 54 | 45 | 4.5 | 188x150x2.5      |
| TL44-14M-40  | 44        | 4F      |           | 3020     | 196.08 | 193.28 | 211 | -   | 155 | 54 | 51 | 1.5 | 211x173x2.5      |
| TL48-14M-40  | 48        | 4F      |           | 3020     | 213.90 | 211.11 | 226 | -   | 170 | 54 | 51 | 1.5 | 226x190x2.5      |
| TL56-14M-40  | 56        | 9WF     |           | 3020     | 249.55 | 246.76 | 256 | 170 | 208 | 54 | 51 | 1.5 | 256x225x2.5      |
| TL64-14M-40  | 64        | 9WF     | CAST IRON | 3020     | 285.21 | 282.41 | 296 | 170 | 240 | 54 | 51 | 1.5 | 296x260x2.5      |
| TL72-14M-40  | 72        | 9W      |           | 3020     | 320.86 | 318.06 |     | 170 | 280 | 54 | 51 | 1.5 | -                |
| TL80-14M-40  | 80        | 9A      |           | 3020     | 356.51 | 353.71 |     | 170 | 315 | 54 | 51 | 1.5 | -                |
| TL90-14M-40  | 90        | 9A      |           | 3020     | 401.07 | 398.28 |     | 170 | 360 | 54 | 51 | 1.5 | -                |
| TL112-14M-40 | 112       | 9A      |           | 3020     | 499.11 | 496.32 |     | 170 | 457 | 54 | 51 | 1.5 | -                |
| TL144-14M-40 | 144       | 9A      |           | 3020     | 641.71 | 638.92 |     | 170 | 600 | 54 | 51 | 1.5 | -                |
| TL168-14M-40 | 168       | 9A      |           | 3020     | 748.66 | 745.87 |     | 170 | 706 | 54 | 51 | 1.5 | -                |
| TL192-14M-40 | 192       | 9A      |           | 3020     | 855.62 | 852.82 |     | 170 | 813 | 54 | 51 | 1.5 | -                |
| TL216-14M-40 | 216       | 9A      |           | 3020     | 962.57 | 959.76 |     | 170 | 920 | 54 | 51 | 1.5 | -                |



# METRIC PULLEY HTD 14M-55

PILLOT BORE, ALLUMINIUM MATERIAL

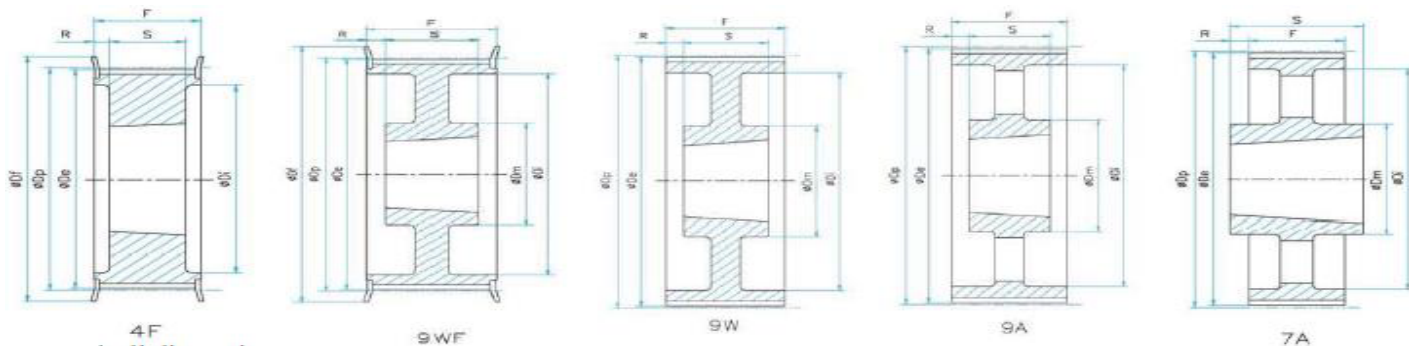


| Part Number  | Teeth No. | Config. | Material  | Bush No. | Dp     | De     | Df  | Dm  | Di  | F  | S  | R    | Flange Dimension |
|--------------|-----------|---------|-----------|----------|--------|--------|-----|-----|-----|----|----|------|------------------|
| TL28-14M-55  | 28        | 4F      | STEEL     | 2012     | 124.78 | 122.12 | 128 | -   | 94  | 70 | 32 | 19   | 128x107x2.5      |
| TL29-14M-55  | 29        | 4F      |           | 2012     | 129.23 | 126.57 | 138 | -   | 100 | 70 | 32 | 19   | 138x112x2.5      |
| TL30-14M-55  | 30        | 4F      |           | 2517     | 133.69 | 130.99 | 138 | -   | 100 | 70 | 45 | 12.5 | 138x112x2.5      |
| TL32-14M-55  | 32        | 4F      |           | 2517     | 142.60 | 139.88 | 154 | -   | 108 | 70 | 45 | 12.5 | 154x122x2.5      |
| TL34-14M-55  | 34        | 4F      |           | 2517     | 151.52 | 148.79 | 160 | -   | 110 | 70 | 45 | 12.5 | 160x130x2.5      |
| TL36-14M-55  | 36        | 4F      |           | 2517     | 160.43 | 157.68 | 168 | -   | 120 | 70 | 45 | 12.5 | 168x135x2.5      |
| TL38-14M-55  | 38        | 4F      |           | 2517     | 169.34 | 166.60 | 183 | -   | 130 | 70 | 45 | 12.5 | 183x145x2.5      |
| TL40-14M-55  | 40        | 4F      |           | 2517     | 178.25 | 175.49 | 188 | -   | 138 | 70 | 45 | 12.5 | 188x150x2.5      |
| TL44-14M-55  | 44        | 4F      |           | 3020     | 196.08 | 193.28 | 211 | -   | 155 | 70 | 51 | 9.5  | 211x173x2.5      |
| TL48-14M-55  | 48        | 4F      |           | 3020     | 213.90 | 211.11 | 226 | -   | 170 | 70 | 51 | 9.5  | 226x190x2.5      |
| TL56-14M-55  | 56        | 9WF     |           | 3020     | 249.55 | 246.76 | 256 | 170 | 208 | 70 | 51 | 9.5  | 256x225x2.5      |
| TL64-14M-55  | 64        | 9WF     | CAST IRON | 3020     | 285.21 | 282.41 | 296 | 170 | 240 | 70 | 51 | 9.5  | 296x260x2.5      |
| TL72-14M-55  | 72        | 9W      |           | 3020     | 320.86 | 318.06 | -   | 170 | 280 | 70 | 51 | 9.5  | -                |
| TL80-14M-55  | 80        | 9A      |           | 3020     | 356.51 | 353.71 | -   | 170 | 315 | 70 | 51 | 9.5  | -                |
| TL90-14M-55  | 90        | 9A      |           | 3020     | 401.07 | 398.28 | -   | 170 | 360 | 70 | 51 | 9.5  | -                |
| TL112-14M-55 | 112       | 9A      |           | 3020     | 499.11 | 496.32 | -   | 170 | 457 | 70 | 51 | 9.5  | -                |
| TL144-14M-55 | 144       | 9A      |           | 3020     | 641.71 | 638.92 | -   | 170 | 600 | 70 | 51 | 9.5  | -                |
| TL168-14M-55 | 168       | 9A      |           | 3020     | 748.66 | 745.87 | -   | 170 | 706 | 70 | 51 | 9.5  | -                |
| TL192-14M-55 | 192       | 9A      |           | 3020     | 855.62 | 852.82 | -   | 170 | 813 | 70 | 51 | 9.5  | -                |
| TL216-14M-55 | 216       | 7A      |           | 3535     | 962.57 | 959.76 | -   | 190 | 920 | 70 | 89 | 9.5  | -                |



# METRIC PULLEY HTD 14M-85

PILLOT BORE, ALLUMINIUM MATERIAL

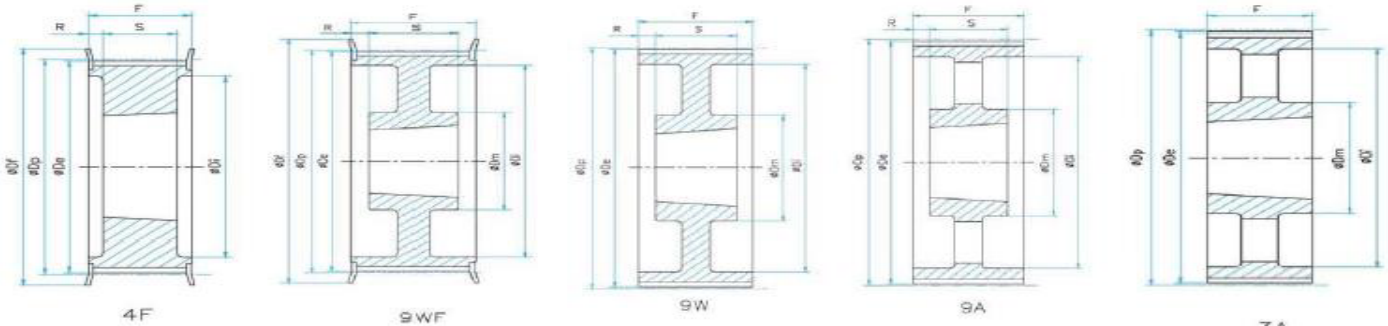


| Part Number  | Teeth No. | Config. | Material  | Bush No. | Dp     | De     | Df  | Dm  | Di  | F   | S   | R    | Flange Dimension |
|--------------|-----------|---------|-----------|----------|--------|--------|-----|-----|-----|-----|-----|------|------------------|
| TL28-14M-85  | 28        | 4F      | STEEL     | 2517     | 124.78 | 122.12 | 128 | -   | 98  | 102 | 45  | 28.5 | 128x107x2.5      |
| TL29-14M-85  | 29        | 4F      |           | 2517     | 129.23 | 126.57 | 138 | -   | 100 | 102 | 45  | 28.5 | 138x112x2.5      |
| TL30-14M-85  | 30        | 4F      |           | 2517     | 133.69 | 130.99 | 138 | -   | 100 | 102 | 45  | 28.5 | 138x112x2.5      |
| TL32-14M-85  | 32        | 4F      |           | 2517     | 142.60 | 139.88 | 154 | -   | 108 | 102 | 45  | 28.5 | 154x122x2.5      |
| TL34-14M-85  | 34        | 4F      |           | 2517     | 151.52 | 148.79 | 160 | -   | 110 | 102 | 45  | 28.5 | 160x130x2.5      |
| TL36-14M-85  | 36        | 4F      |           | 3020     | 160.43 | 157.68 | 168 | -   | 120 | 102 | 51  | 22.5 | 168x135x2.5      |
| TL38-14M-85  | 38        | 4F      |           | 3020     | 169.34 | 166.60 | 183 | -   | 130 | 102 | 51  | 22.5 | 183x145x2.5      |
| TL40-14M-85  | 40        | 4F      |           | 3020     | 178.25 | 175.49 | 188 | -   | 138 | 102 | 51  | 22.5 | 188x150x2.5      |
| TL44-14M-85  | 44        | 4F      |           | 3020     | 196.08 | 193.28 | 211 | -   | 155 | 102 | 51  | 22.5 | 211x173x2.5      |
| TL48-14M-85  | 48        | 4F      |           | 3020     | 213.90 | 211.11 | 226 | -   | 170 | 102 | 51  | 22.5 | 226x190x2.5      |
| TL56-14M-85  | 56        | 4F      |           | 3525     | 249.55 | 246.76 | 256 | 170 | 208 | 102 | 65  | 18.5 | 256x225x2.5      |
| TL64-14M-85  | 64        | 9WF     | CAST IRON | 3525     | 285.21 | 282.41 | 296 | 170 | 240 | 102 | 65  | 18.5 | 296x260x2.5      |
| TL72-14M-85  | 72        | 9W      |           | 3525     | 320.86 | 318.06 | -   | 170 | 280 | 102 | 65  | 18.5 | -                |
| TL80-14M-85  | 80        | 9A      |           | 3525     | 356.51 | 353.71 | -   | 170 | 315 | 102 | 65  | 18.5 | -                |
| TL90-14M-85  | 90        | 9A      |           | 3525     | 401.07 | 398.28 | -   | 170 | 360 | 102 | 65  | 18.5 | -                |
| TL112-14M-85 | 112       | 9A      |           | 3525     | 499.11 | 496.32 | -   | 170 | 457 | 102 | 65  | 18.5 | -                |
| TL144-14M-85 | 144       | 9A      |           | 3525     | 641.71 | 638.92 | -   | 170 | 600 | 102 | 65  | 18.5 | -                |
| TL168-14M-85 | 168       | 9A      |           | 3525     | 748.66 | 745.87 | -   | 170 | 706 | 102 | 65  | 18.5 | -                |
| TL192-14M-85 | 192       | 3A      |           | 4040     | 855.62 | 852.82 | -   | 170 | 813 | 102 | 102 | -    | -                |
| TL216-14M-85 | 216       | 3A      |           | 4040     | 962.57 | 959.76 | -   | 190 | 920 | 102 | 102 | -    | -                |




# METRIC PULLEY HTD 14M-115


PILLOT BORE, ALLUMINIUM MATERIAL




4F



9WF



9W






9A

| Part Number   | Teeth No. | Config. | Material  | Bush No. | Dp     | De     | Df  | Dm  | Di  | F   | S   | R    | Flange Dimension |
|---------------|-----------|---------|-----------|----------|--------|--------|-----|-----|-----|-----|-----|------|------------------|
| TL28-14M-115  | 28        | 4F      | STEEL     | 2517     | 124.78 | 122.12 | 128 | -   | 98  | 133 | 45  | 44   | 128x107x2.5      |
| TL29-14M-115  | 29        | 4F      |           | 2517     | 129.23 | 126.57 | 138 | -   | 100 | 133 | 45  | 44   | 138x112x2.5      |
| TL30-14M-115  | 30        | 4F      |           | 2517     | 133.69 | 130.99 | 138 | -   | 100 | 133 | 45  | 44   | 138x112x2.5      |
| TL32-14M-115  | 32        | 4F      |           | 2517     | 142.60 | 139.88 | 154 | -   | 108 | 133 | 45  | 44   | 154x122x2.5      |
| TL34-14M-115  | 34        | 4F      |           | 2517     | 151.52 | 148.79 | 160 | -   | 110 | 133 | 45  | 44   | 160x130x2.5      |
| TL36-14M-115  | 36        | 4F      |           | 3020     | 160.43 | 157.68 | 168 | -   | 120 | 133 | 51  | 41   | 168x135x2.5      |
| TL38-14M-115  | 38        | 4F      |           | 3020     | 169.34 | 166.60 | 183 | -   | 130 | 133 | 51  | 41   | 183x145x2.5      |
| TL40-14M-115  | 40        | 4F      |           | 3020     | 178.25 | 175.49 | 188 | -   | 138 | 133 | 51  | 41   | 188x150x2.5      |
| TL44-14M-115  | 44        | 4F      |           | 3020     | 196.08 | 193.28 | 211 | -   | 155 | 133 | 76  | 28.5 | 211x173x2.5      |
| TL48-14M-115  | 48        | 4F      |           | 3020     | 213.90 | 211.11 | 226 | -   | 170 | 133 | 76  | 28.5 | 226x190x2.5      |
| TL56-14M-115  | 56        | 4F      |           | 3525     | 249.55 | 246.76 | 256 | -   | 208 | 133 | 89  | 22   | 256x225x2.5      |
| TL64-14M-115  | 64        | 9WF     | CAST IRON | 3535     | 285.21 | 282.41 | 296 | 190 | 240 | 133 | 89  | 22   | 296x260x2.5      |
| TL72-14M-115  | 72        | 9W      |           | 3535     | 320.86 | 318.06 | -   | 190 | 280 | 133 | 89  | 22   | -                |
| TL80-14M-115  | 80        | 9A      |           | 3535     | 356.51 | 353.71 | -   | 190 | 315 | 133 | 89  | 22   | -                |
| TL90-14M-115  | 90        | 9A      |           | 3535     | 401.07 | 398.28 | -   | 190 | 360 | 133 | 89  | 22   | -                |
| TL112-14M-115 | 112       | 9A      |           | 3535     | 499.11 | 496.32 | -   | 190 | 457 | 133 | 89  | 22   | -                |
| TL144-14M-115 | 144       | 9A      |           | 4040     | 641.71 | 638.92 | -   | 230 | 600 | 133 | 102 | 15.5 | -                |
| TL168-14M-115 | 168       | 9A      |           | 4040     | 748.66 | 745.87 | -   | 230 | 706 | 133 | 102 | 15.5 | -                |
| TL192-14M-115 | 192       | 3A      |           | 4040     | 855.62 | 852.82 | -   | 230 | 813 | 133 | 102 | 15.5 | -                |
| TL216-14M-115 | 216       | 3A      |           | 4040     | 962.57 | 959.76 | -   | 230 | 920 | 133 | 102 | 15.5 | -                |



# METRIC PULLEY HTD 14M-170

PILLOT BORE, ALLUMINIUM MATERIAL

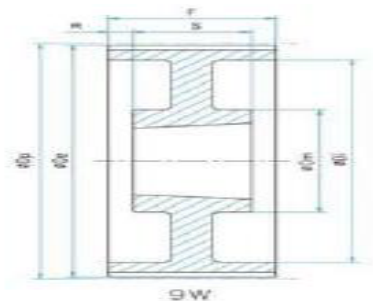

| Part Number   | Teeth No. | Config. | Material  | Bush No. | Dp     | De     | Df  | Dm  | Di  | F   | S   | R    | Flange Dimension |
|---------------|-----------|---------|-----------|----------|--------|--------|-----|-----|-----|-----|-----|------|------------------|
| TL38-14M-170  | 38        | 4F      | STEEL     | 3030     | 169.34 | 166.60 | 183 | -   | 130 | 187 | 76  | 55.5 | 183x145x2.5      |
| TL40-14M-170  | 40        | 4F      |           | 3030     | 178.25 | 175.49 | 188 | -   | 138 | 187 | 76  | 55.5 | 188x150x2.5      |
| TL44-14M-170  | 44        | 4F      |           | 3535     | 196.08 | 193.28 | 211 | -   | 153 | 187 | 89  | 49   | 211x173x2.5      |
| TL48-14M-170  | 48        | 4F      |           | 3535     | 213.90 | 211.11 | 226 | -   | 170 | 187 | 89  | 49   | 226x190x2.5      |
| TL56-14M-170  | 56        | 4F      |           | 3535     | 249.55 | 246.76 | 256 | -   | 208 | 187 | 89  | 49   | 256x225x2.5      |
| TL64-14M-170  | 64        | 4F      | CAST IRON | 4040     | 285.21 | 282.41 | 296 | -   | 240 | 187 | 102 | 42.5 | 296x260x2.5      |
| TL72-14M-170  | 72        | 9W      |           | 4040     | 320.86 | 318.06 | -   | 230 | 280 | 187 | 102 | 42.5 | -                |
| TL80-14M-170  | 80        | 9W      |           | 4040     | 356.51 | 353.71 | -   | 230 | 315 | 187 | 102 | 42.5 | -                |
| TL90-14M-170  | 90        | 9A      |           | 4040     | 401.07 | 398.28 | -   | 230 | 360 | 187 | 102 | 42.5 | -                |
| TL112-14M-170 | 112       | 9A      |           | 5050     | 499.11 | 496.32 | -   | 265 | 457 | 187 | 127 | 30   | -                |
| TL144-14M-170 | 144       | 9A      |           | 5050     | 641.71 | 638.92 | -   | 265 | 600 | 187 | 127 | 30   | -                |
| TL168-14M-170 | 168       | 9A      |           | 5050     | 748.66 | 745.87 | -   | 265 | 706 | 187 | 127 | 30   | -                |
| TL192-14M-170 | 192       | 9A      |           | 5050     | 855.62 | 852.82 | -   | 265 | 813 | 187 | 127 | 30   | -                |
| TL216-14M-170 | 216       | 9A      |           | 5050     | 962.57 | 959.76 | -   | 265 | 920 | 187 | 127 | 30   | -                |